CHI MEI
OPTOELECTRONICS CORP.

Approval

TFT LCD Approval Specification

MODEL NO.: M190A1-L07

Customer: _____ HP _____

Approved by: _____

Note:

記錄	工作	審核	角色	投票
2007-12-26 19:26:44 CST	PMMD Director	cs_lee(李志聖 /56510/44926)	Director	Accept

Version 3.0

- CONTENTS -

Version 3.0

REVISION HISTORY

	Date	Section	Description
3.0	Nov. 02, 07'	All	M190A1-L07 Specifications was first issued.

Version 3.0

1. GENERAL DESCRIPTION

1.1 OVERVIEW

M190A1-L07 is a 19" wide TFT Liquid Crystal Display module with 4 CCFL Backlight unit and 30 pins 2ch-LVDS interface. This module supports 1440 x 900 WXGA+ mode and can display 16.7M colors. The inverter module for Backlight is not built in.

1.2 FEATURES

- Super Wide viewing angle.

- Super High contrast ratio

- Super fast response time

- High color saturation

- WXGA+ (1440 x 900 pixels) resolution

- DE (Data Enable) only mode

- LVDS (Low Voltage Differential Signaling) interface

- RoHS Compliance

1.3 APPLICATION

- TFT LCD Monitor

1.4 GENERAL SPECIFICATI0NS

Item	Specification	Unit	Note
Diagonal Size	483.96 (19.05" diagonal)	mm	
Active Area	410.4 (H) x 256.5 (V)	mm	(1)
Bezel Opening Area	414.36 x 260.45	mm	
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1440 x R.G.B. x 900	pixel	-
Pixel Pitch	0.285 (H) x 0.285 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	16.7M	color	-
Transmissive Mode	Normally White	-	-
Color saturation	72%NTSC (typ.)	-	-
Surface Treatment	Hard coating (3H), Anti-Glare (Haze 25)	-	-

1.5 MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal(H)	426.7	427.2	427.7	mm	(1)
	Vertical(V)	276.9	277.4	277.9	mm	
	Depth(D)	-	16.0	16.5	mm	
Weight		-	1830	1900	g	-

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Version 3.0

Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T_{ST}	-20	+60	ºC	(1)
Operating Ambient Temperature	T_{OP}	0	+50	ºC	(1), (2)
Shock (Non-Operating)	S_{NOP}	-	50	G	(3), (5)
Vibration (Non-Operating)	V_{NOP}	-	1.5	G	(4), (5)

Note (1) Temperature and relative humidity range is shown in the figure below.

(a) 90 %RH Max. (Ta $\leqq$ 40 ºC).

(b) Wet-bulb temperature should be 39 ºC Max. (Ta > 40 ºC).

(c) No condensation.

Relative Humidity (%RH)
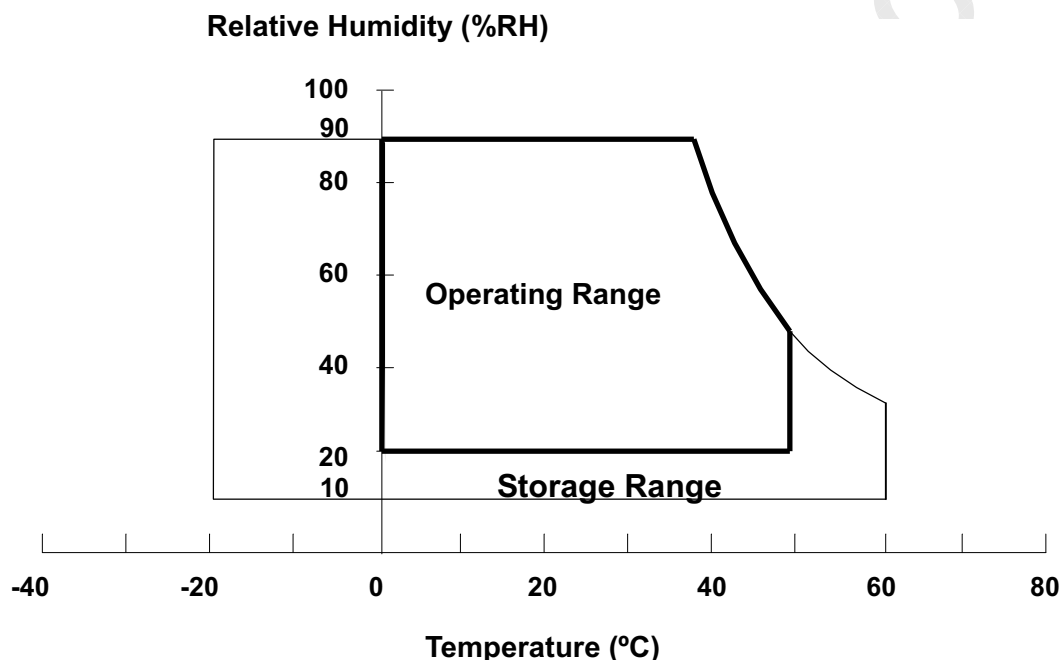
Temperature (ºC)

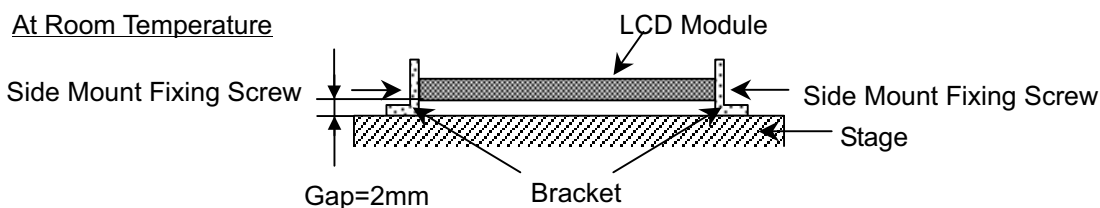Note (2) The temperature of panel display surface area should be 0 ºC Min. and 60 ºC Max.

Note (3) 50G,11ms, half sine wave, 1 time for ± X, ± Y, ± Z.

Note (4) 10 ~ 300 Hz, 10min/cycle, 3 cycles each X, Y, Z.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough

so that the module would not be twisted or bent by the fixture.

5 / 25

Version 3.0

Approval

2.2 ELECTRICAL ABSOLUTE RATINGS

2.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	Vcc	-0.3	+6.0	V	(1)
Logic Input Voltage	V_{IN}	-0.3	4.3	V	

2.2.2 BACKLIGHT UNIT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Lamp Voltage	V_L	-	2.0K	V_{RMS}	(1), (2), I_L = 7.0mA
Lamp Current	I_L	-	7.5	mA_{RMS}	(1), (2)
Lamp Frequency	F_L	-	80	KHz	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation

should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for lamp (Refer to 3.2 for further information).

Version 3.0

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta = 25 ± 2 ℃

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		Vcc	4.5	5.0	5.5	V	-
Ripple Voltage		V_{RP}	-	-	100	mV	-
Rush Current		I_{RUSH}	-	-	3	A	(2)
Power Supply Current	White	Icc	-	0.5	0.7	A	(3)a
	Black		-	0.7	1.0	A	(3)b
	Vertical Stripe		-	0.7	1.0	A	(3)c
LVDS differential input voltage		Vid	100	-	600	mV	
LVDS common input voltage		Vic	-	1.2	-	V	
Logic "L" input voltage		Vil	Vss	-	0.8	V	

Note (1) The module should be always operated within above ranges.

Note (2) Measurement Conditions:
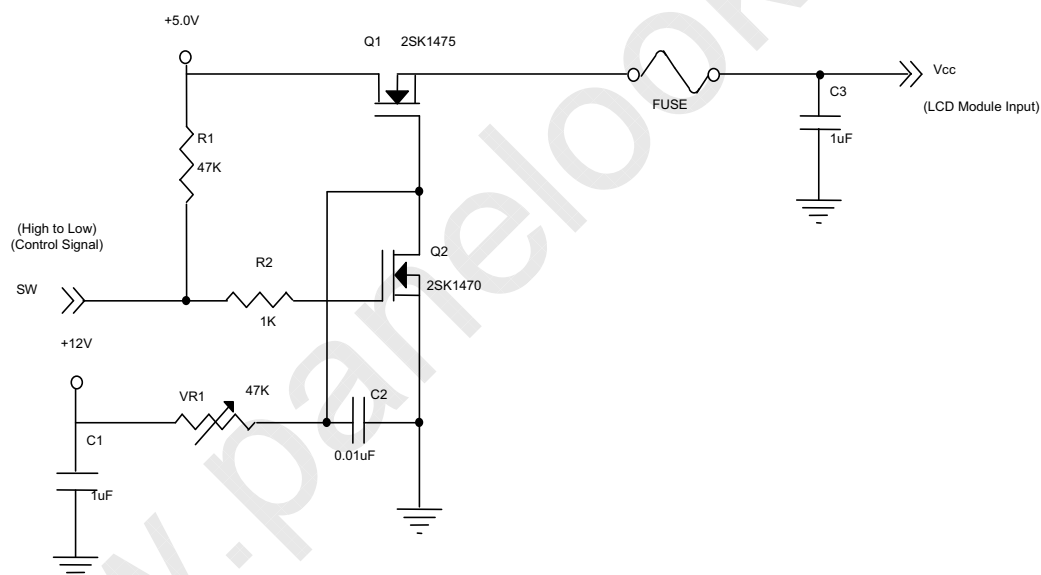
Vcc rising time is 470μs

Version 3.0
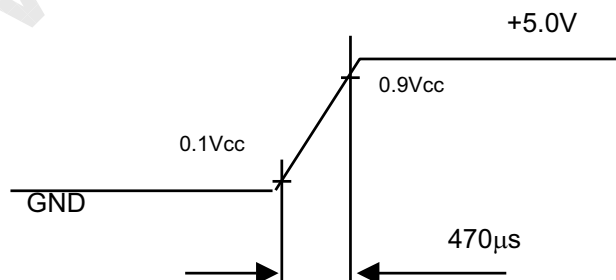
Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval

Note (3) The specified power supply current is under the conditions at Vcc = 5.0 V, Ta = 25 ± 2 ºC, f_v = 60

Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern

Active Area

b. Black Pattern

Active Area

c. Vertical Stripe Pattern

Active Area

8 / 25

**Version 3.0**

Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval
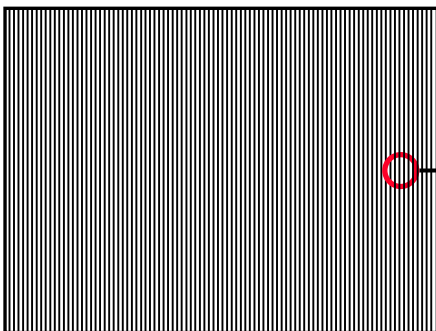
3.2 BACKLIGHT UNIT

Ta = 25 ± 2 ℃

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Lamp Input Voltage	V_L	---	775	853	V_{RMS}	I_L = 7.0 mA
Lamp Current	I_L	2.0	7.0	7.5	mA_{RMS}	(1)
Lamp Turn On Voltage	V_S	---	---	1500(25℃)	V_{RMS}	(2)
		---	---	1710(0℃)	V_{RMS}	(2)
Operating Frequency	F_L	40	---	80	KHz	(3)
Lamp Life Time	L_{BL}	40000	50000	---	Hrs	(5)
Power Consumption	P_L	---	21.7	---	W	(4), I_L = 7.0 mA

Note (1) Lamp current is measured by utilizing high frequency current meters as shown below:
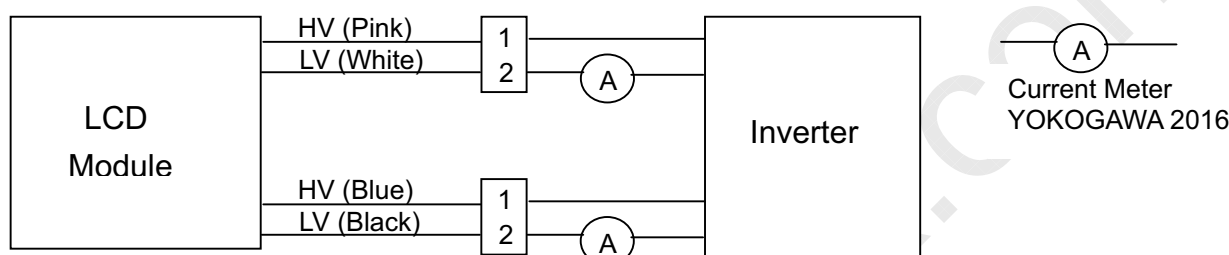
Note (2) The voltage that must be larger than Vs should be applied to the lamp for more than 1 second after startup. Otherwise the lamp may not be turned on.

Note (3) The lamp frequency may produce interference with horizontal synchronous frequency from the display, and this may cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

Note (4) $P_L = I_L \times V_L \times$ 4 CCFLs

Note (5) The lifetime of lamp can be defined as the time in which it continues to operate under the condition **Ta = 25 $\pm$2 °C and I_L = 7.0 mA rms** until one of the following events occurs:

(a) When the brightness becomes or lower than 50% of its original value.

(b) When the effective ignition length becomes $\leqq$ 80% of its original value.

(The effective ignition length is a scope that luminance is over 70% of that at the center point.)

Note (6) The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid producing too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

The output of the inverter must have symmetrical (negative and positive) voltage waveform and

Version 3.0

Approval

symmetrical current waveform.(Unsymmetrical ratio is less than 10%) Please do not use the inverter which has unsymmetrical voltage and unsymmetrical current and spike wave. Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.

Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp. It shall help increase the lamp lifetime and reduce its leakage current.

a. The asymmetry rate of the inverter waveform should be 10% below;

b. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$;

    c. The ideal sine wave form shall be symmetric in positive and negative polarities.
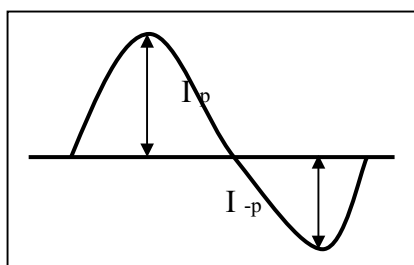
* Asymmetry rate:

$$| I_p - I_{-p} | / I_{rms} * 100\%$$

* Distortion rate

$$I_p \text{ (or } I_{-p}) / I_{rms}$$

4. BLOCK DIAGRAM

Version 3.0

Approval

4.1 TFT LCD MODULE

RXO0(+/-)
RXO1(+/-)
RXO2(+/-)
RXO3(+/-)
RXOC(+/-)
RXE0(+/-)
RXE1(+/-)
RXE2(+/-)
RXE3(+/-)
RXEC(+/-)
NC
Vcc
GND

INPUT CONNECTOR
(JAE- FI-X30SSL-HF or
STARCONN 093G30-B001A)

LVDS INPUT /
TIMING CONTROLLER

SCAN DRIVER IC

TFT LCD PANEL
(1440x3x900)

DC/DC CONVERTER &
REFERENCE VOLTAGE

DATA DRIVER IC

VL

LAMP CONNECTOR
(YEONHO 35001HS-02L)

BACKLIGHT UNIT

4.2 BACKLIGHT

1 HV(Pink)
2 LV(White)
1 HV(Blue)
2 LV(Black)

1 HV(Pink)
2 LV(White)
1 HV(Blue)
2 LV(Black)
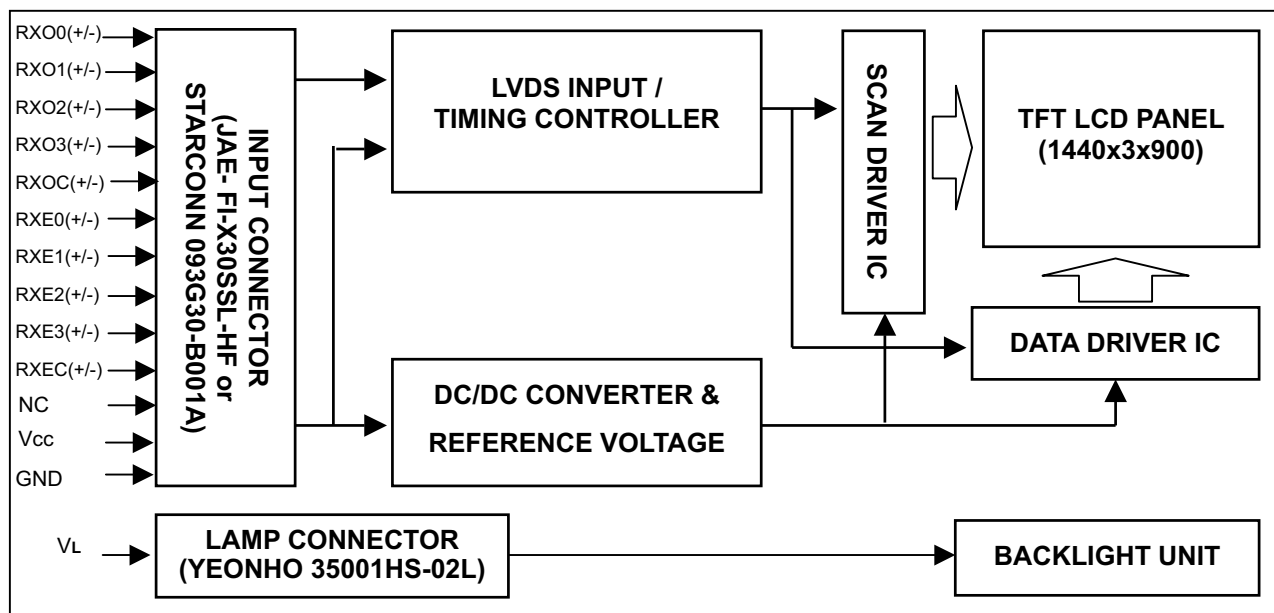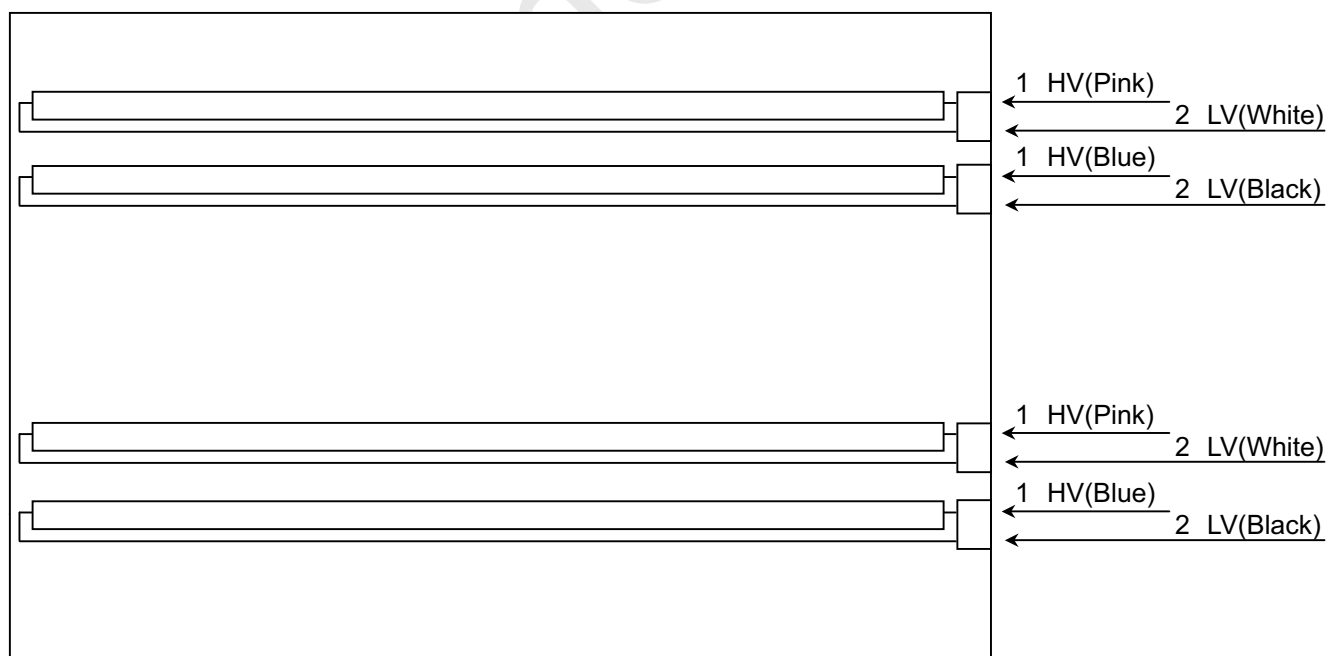
Note: On the same side, the same-polarity lamp voltage design for lamps is recommended.

Version 3.0

Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval

5. INPUT TERMINAL PIN ASSIGNMENT

5.1 TFT LCD MODULE

Pin	Name	Description
1	RXO0-	Negative LVDS differential data input. Channel O0 (odd)
2	RXO0+	Positive LVDS differential data input. Channel O0 (odd)
3	RXO1-	Negative LVDS differential data input. Channel O1 (odd)
4	RXO1+	Positive LVDS differential data input. Channel O1 (odd)
5	RXO2-	Negative LVDS differential data input. Channel O2 (odd)
6	RXO2+	Positive LVDS differential data input. Channel O2 (odd)
7	GND	Ground
8	RXOC-	Negative LVDS differential clock input. (odd)
9	RXOC+	Positive LVDS differential clock input. (odd)
10	RXO3-	Negative LVDS differential data input. Channel O3(odd)
11	RXO3+	Positive LVDS differential data input. Channel O3 (odd)
12	RXE0-	Negative LVDS differential data input. Channel E0 (even)
13	RXE0+	Positive LVDS differential data input. Channel E0 (even)
14	GND	Ground
15	RXE1-	Negative LVDS differential data input. Channel E1 (even)
16	RXE1+	Positive LVDS differential data input. Channel E1 (even)
17	GND	Ground
18	RXE2-	Negative LVDS differential data input. Channel E2 (even)
19	RXE2+	Positive LVDS differential data input. Channel E2 (even)
20	RXEC-	Negative LVDS differential clock input. (even)
21	RXEC+	Positive LVDS differential clock input. (even)
22	RXE3-	Negative LVDS differential data input. Channel E3 (even)
23	RXE3+	Positive LVDS differential data input. Channel E3 (even)
24	GND	Ground
25	NC	Not connection (Should keep open).
26	NC	Not connection (Should keep open).
27	NC	Not connection (Should keep open).
28	VCC	+5.0V power supply
29	VCC	+5.0V power supply
30	VCC	+5.0V power supply

Note (1) Connector Part No.: 093G30-B001A (STARCONN) or FI-X30SSL-HF (JAE) or equivalent.

Note (2) The first pixel is odd.

Note (3) Input signal of even and odd clock should be the same timing.

Version 3.0

Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval

LVDS Channel E0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	EG0	ER5	ER4	ER3	ER2	ER1	ER0
LVDS Channel E1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	EB1	EB0	EG5	EG4	EG3	EG2	EG1
LVDS Channel E2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	EB5	EB4	EB3	EB2
LVDS Channel E3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	EB7	EB6	EG7	EG6	ER7	ER6
LVDS Channel O0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	OG0	OR5	OR4	OR3	OR2	OR1	OR0
LVDS Channel O1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	OB1	OB0	OG5	OG4	OG3	OG2	OG1
LVDS Channel O2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	OB5	OB4	OB3	OB2
LVDS Channel O3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	OB7	OB6	OG7	OG6	OR7	OR6

Version 3.0

Approval

5.2 BACKLIGHT UNIT

Pin	Symbol	Description	Remark
1	HV	High Voltage	Pink
2	LV	Low Voltage	White

1	HV	High Voltage	Blue
2	LV	Low Voltage	Black

Note (1) Connector Part No.: 35001HS-02L (YEONHO) or equivalent

Note (2) User's connector Part No.: 35001WR-02L (YEONHO) or equivalent

5.3 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																						
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	R7	R6	G5	G4	G3	G2	G1	G0	R7	R6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

**Version 3.0**

Approval

6. INTERFACE TIMING

6.1 INPUT SIGNAL TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

| Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Clock	Frequency	Fc	-	44.5	65	MHz	-
	Period	Tc	17.9	22.5	-	ns	
	High Time	Tch	-	4/7	-	Tc	-
	Low Time	Tcl	-	3/7	-	Tc	-
LVDS Data	Setup Time	Tlvs	600	-	-	ps	-
	Hold Time	Tlvh	600	-	-	ps	-
Vertical Active Display Term	Frame Rate	Fr	50	60	75	Hz	Tv=Tvd+Tvb
	Total	Tv	905	926	1050	Th	-
	Display	Tvd	900	900	900	Th	-
	Blank	Tvb	Tv-Tvd	26	Tv-Tvd	Th	-
Horizontal Active Display Term	Total	Th	750	800	960	Tc	Th=Thd+Thb
	Display	Thd	720	720	720	Tc	-
	Blank	Thb	Th-Thd	80	Th-Thd	Tc	-

Note: Because this module is operated by DE only mode, Hsync and Vsync input signals should be set to low logic level or ground. Otherwise, this module would operate abnormally.

INPUT SIGNAL TIMING DIAGRAM

Version 3.0

Approval
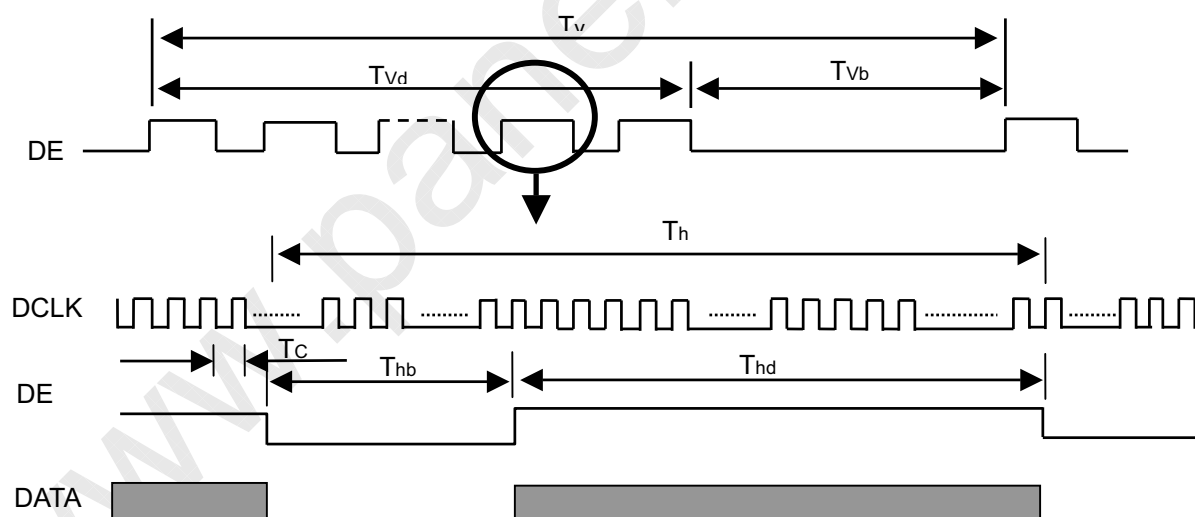
6.2 POWER ON/OFF SEQUENCE

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.
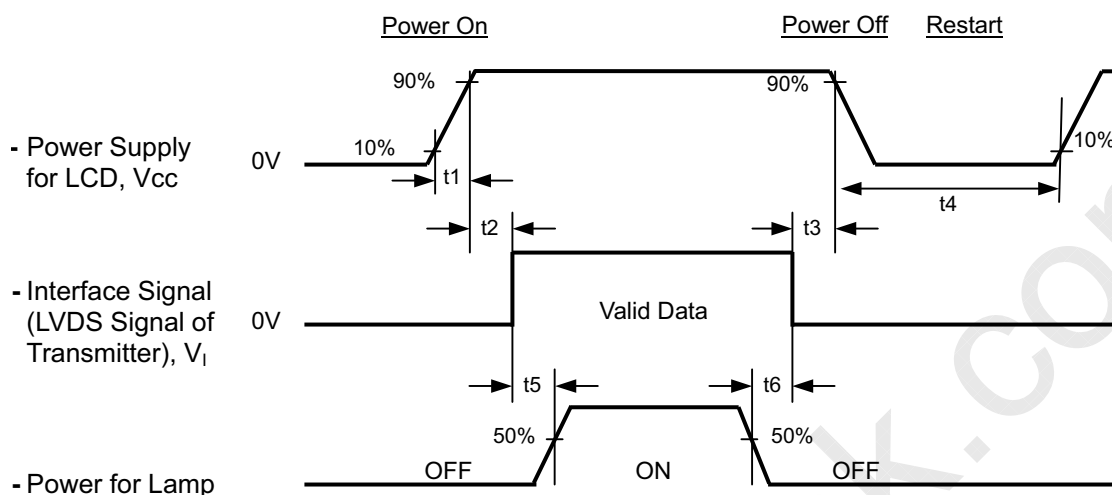
Timing Specifications:

$0.5 < t1 \leqq 10$ msec

$0 < t2 \leqq 50$ msec

$0 < t3 \leqq 50$ msec

$t4 \geqq 500$ msec

$t5 \geqq 450$ msec

$t6 \geqq 90$ msec

Note.

(1) The supply voltage of the external system for the module input should be the same as the definition of Vcc.

(2) Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation of the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.

(3) In case of VCC = off level, please keep the level of input signals on the low or keep a high impedance.

(4) T4 should be measured after the module has been fully discharged between power of and on period.

(5) Interface signal shall not be kept at high impedance when the power is on.

Version 3.0

Approval

7. OPTICAL CHARACTERISTICS

7.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	^{o}C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V_{CC}	5.0	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
Lamp Current	I_L	7.0	mA
Inverter Operating Frequency	F_L	55	KHz
Inverter	Darfon VK.13165.101		

7.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 7.2. The following items should

be measured under the test conditions described in 7.1 and stable environment shown in Note (5).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Color Chromaticity	Red	Rx	$\theta_x=0°$, $\theta_Y=0°$ CS-1000T	Typ – 0.03	0.647	Typ + 0.03		(1), (5)
		Ry			0.334			
	Green	Gx			0.284			
		Gy			0.607			
	Blue	Bx			0.151			
		By			0.071			
	White	Wx			0.313			
		Wy			0.329			
Center Luminance of White		L_C		300	380	---	cd/m^2	(4), (5)
Contrast Ratio		CR		630	1000	---	-	(2), (5)
Response Time		T_R	$\theta_x=0°$, $\theta_Y=0°$	---	1.5	6.5	ms	(3)
		T_F		---	3.5	8.5	ms	
White Variation		δW	$\theta_x=0°$, $\theta_Y=0°$	---	1.25	1.32	-	(5), (6)
Viewing Angle	Horizontal	θ_x+	CR $\geq$ 10	75	85	---	Deg.	(1), (5)
		θ_x-		75	85	---		
	Vertical	θ_Y+		70	80	---		
		θ_Y-		70	80	---		

Version 3.0

Approval

Note (1) Definition of Viewing Angle (θx, θy):
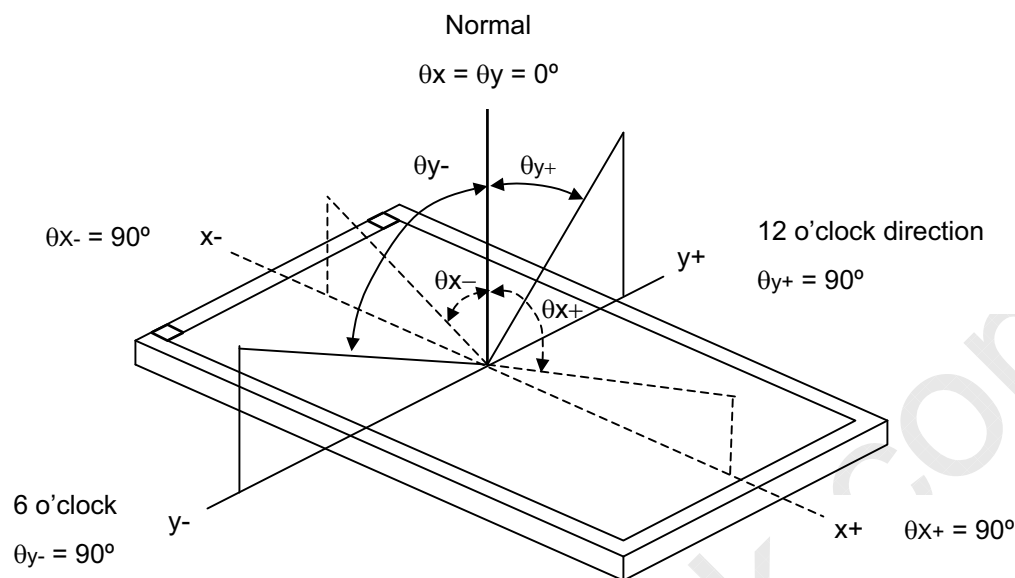
Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L255 / L0

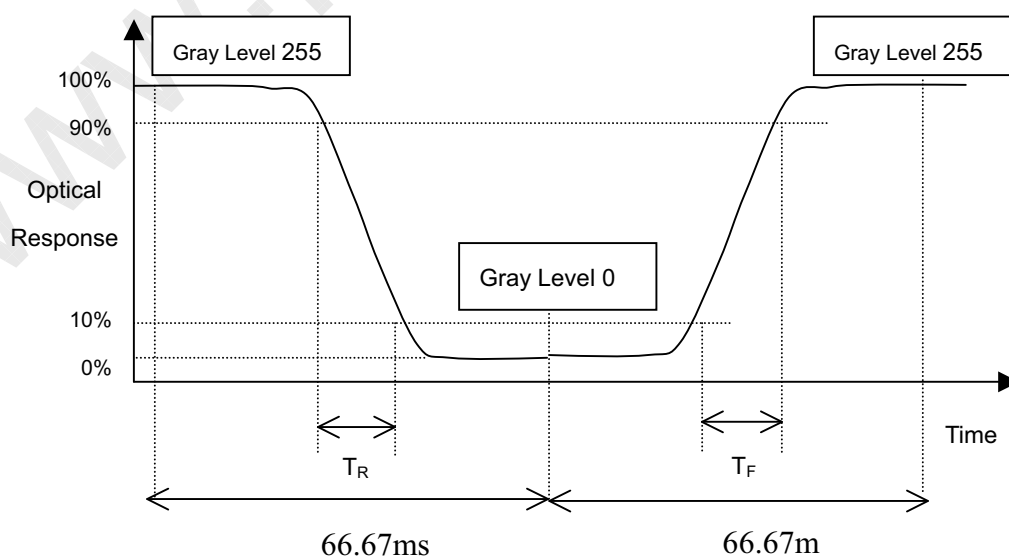L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R, T_F):

18 / 25

Version 3.0

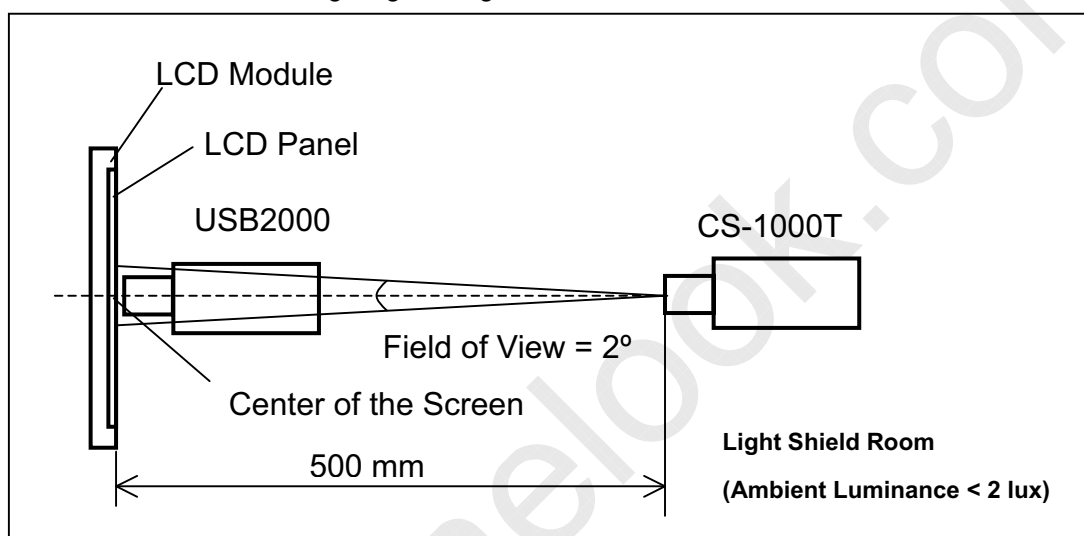**Approval**

Note (4) Definition of Luminance of White (L_C):

Measure the luminance of gray level 255 at center point

$L_C = L (5)$

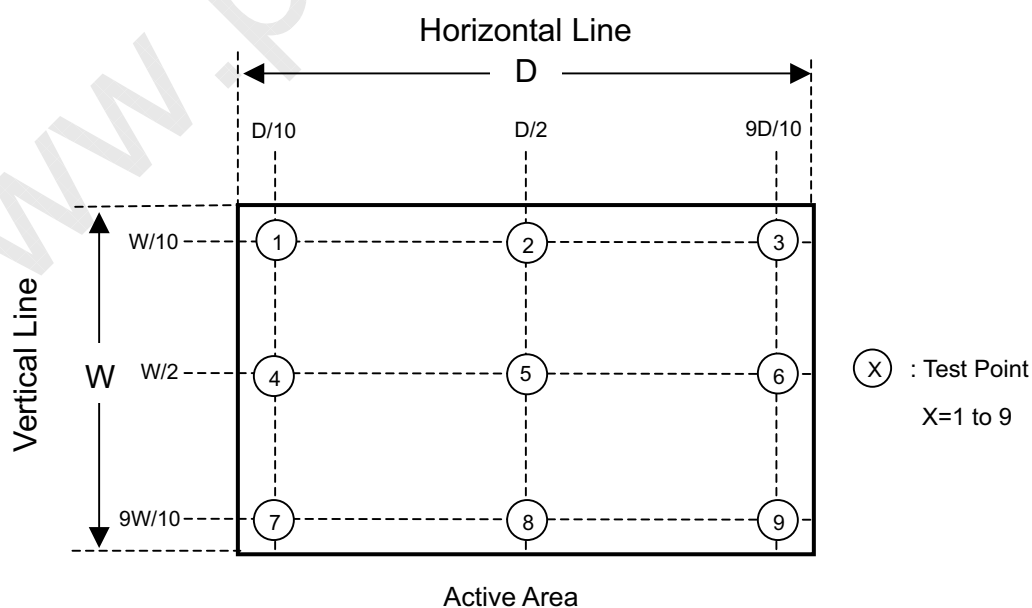L (x) is corresponding to the luminance of the point X at Figure in Note (6).

Note (5) Measurement Setup:

The LCD module should be stabilized at given temperature for 40 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 40 minutes in a windless room.

```
              LCD Module

                 LCD Panel

           USB2000                          CS-1000T


                        Field of View = 2º

           Center of the Screen
                                         Light Shield Room
                 500 mm
                                         (Ambient Luminance < 2 lux)
```

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 9 points

δW = Maximum [L (1), L (2) ……L (4), L (9)] / Minimum [L (1), L (2) …… L (4), L (9)]

```
                       Horizontal Line
                              D

        D/10              D/2              9D/10


   W/10     (1)           (2)           (3)


   W/2      (4)           (5)           (6)        (X) : Test Point
                                                        X=1 to 9

   9W/10    (7)           (8)           (9)

                       Active Area
```

Version 3.0

8. PACKAGING

8.1 PACKING SPECIFICATIONS

(1) 5 LCD modules / 1 Box

(2) Box dimensions: 545(L) X 320 (W) X 360 (H) mm

(3) Weight: approximately 10.9 Kg (5 modules per box)

8.2 PACKING METHOD

(1) Carton Packing should have no failure in the following reliability test items.

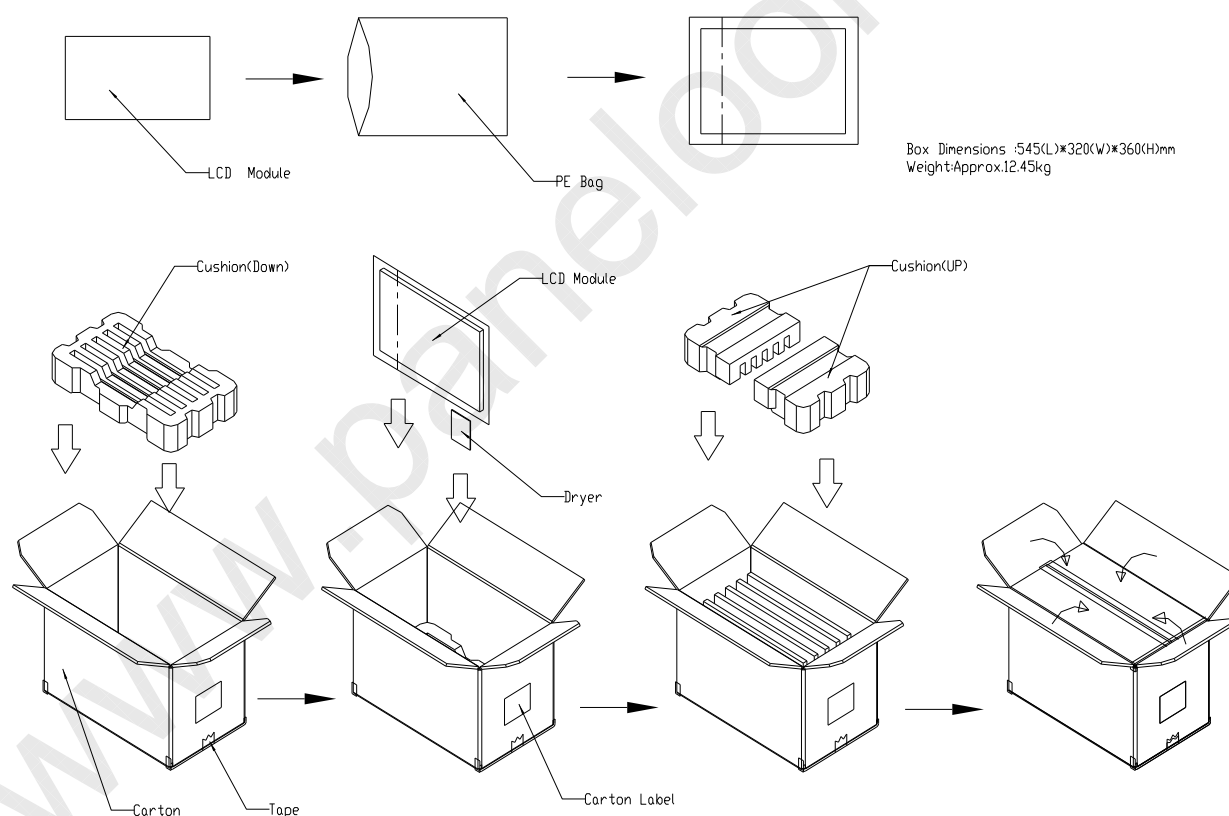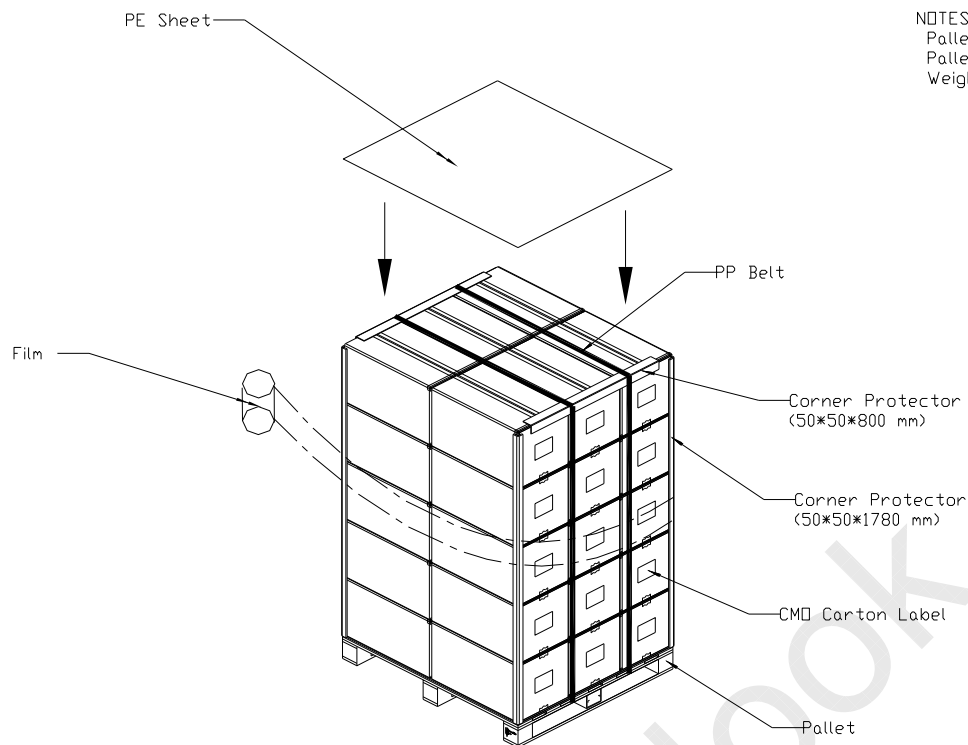| Test Item	Test Conditions	Note
Vibration	ISTA STANDARD Random, Frequency Range: 1 – 200 Hz Top & Bottom: 30 minutes (+Z), 10 min (-Z), Right & Left: 10 minutes (X) Back & Forth 10 minutes (Y)	Non Operation
Dropping Test	1 Corner, 3 Edge, 6 Face, 60cm	Non Operation

Figure. 8-1 Packing method

Version 3.0

Doc. No.:
Issued Date:Nov., 02, 2007
Model No.: M190A1-L07

Approval

For ocean shipping

NOTES:
 Pallet:L1100*W970*H135mm
 Pallet Stock Dim:L1100*W970*H1945mm
 Weight:Approx.388.7kg

PE Sheet

PP Belt

Film

Corner Protector
(50*50*800 mm)

Corner Protector
(50*50*1780 mm)

CM□ Carton Label

Pallet

Figure. 8-2 Packing method

For air transport
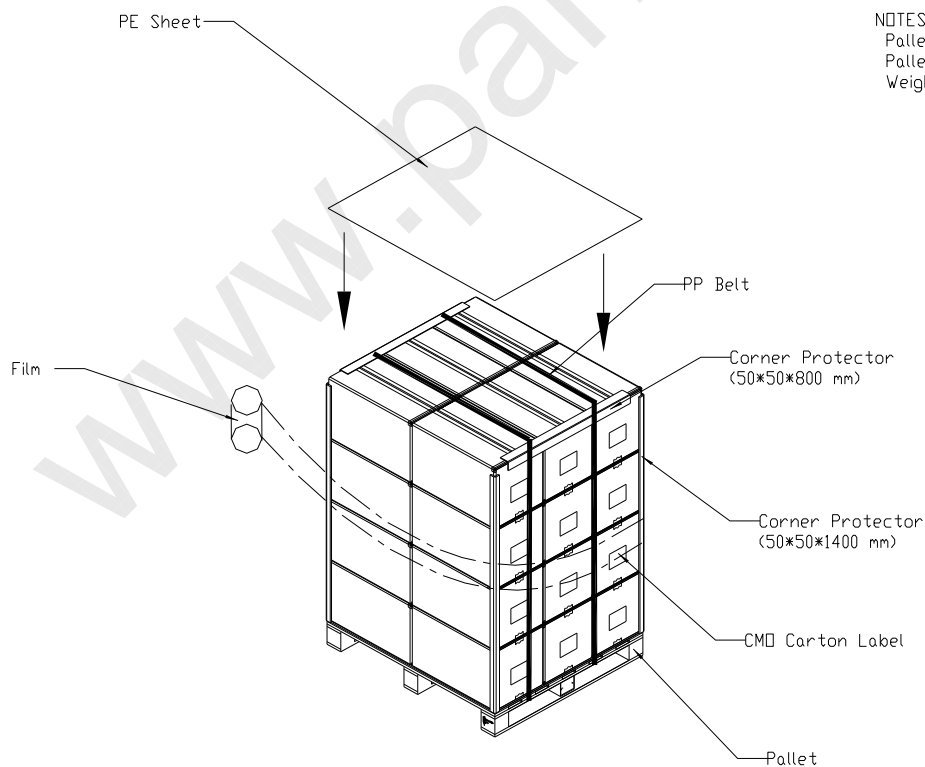
NOTES:
 Pallet:L1100*W970*H135mm
 Pallet Stock Dim:L1100*W970*H1583mm
 Weight:Approx.310kg

PE Sheet

PP Belt

Film

Corner Protector
(50*50*800 mm)

Corner Protector
(50*50*1400 mm)

CM□ Carton Label

Pallet

Figure. 8-3 Packing method

Version 3.0

Approval

9. DEFINITION OF LABELS

9.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

M190A1-L07   Rev.

XXXXXXXYMDLNNNN

(LEOO)

RoHS

CM19A19XXXXXLXXLYM DNNNN
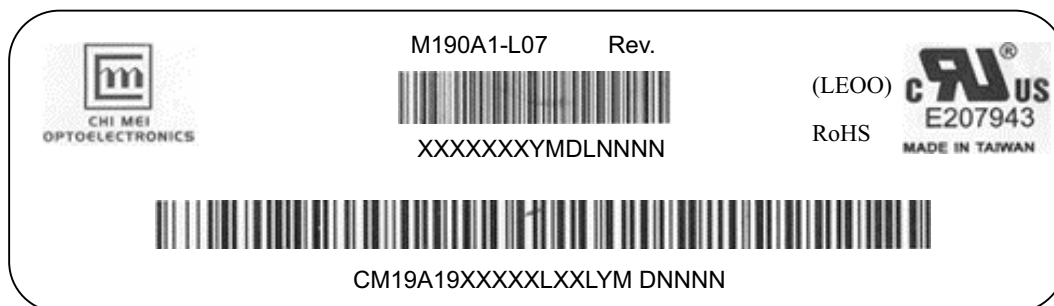
(a) Model Name: M190A1-L07

(b) Revision: Rev. XX, for example: A0, A1… B1, B2… or C1, C2…etc.

(c) CMO barcode definition:

Serial ID: XX-XX-X-XX-YMD-L-NNNN

Code	Meaning	Description
XX	CMO internal use	-
XX	Revision	Cover all the change
X	CMO internal use	-
YMD	Year, month, day	Year: 2001=1, 2002=2, 2003=3, 2004=4… Month: 1~12=1, 2, 3, ~, 9, A, B, C Day: 1~31=1, 2, 3, ~, 9, A, B, C, ~, W, X, Y, exclude I, O, and U.
L	Product line #	Line 1=1, Line 2=2, Line 3=3, …
NNNN	Serial number	Manufacturing sequence of product

(d) Customer's barcode definition:

Serial ID: CM-19A17-X-X-X-XX-L-XX-L-YMD-NNNN

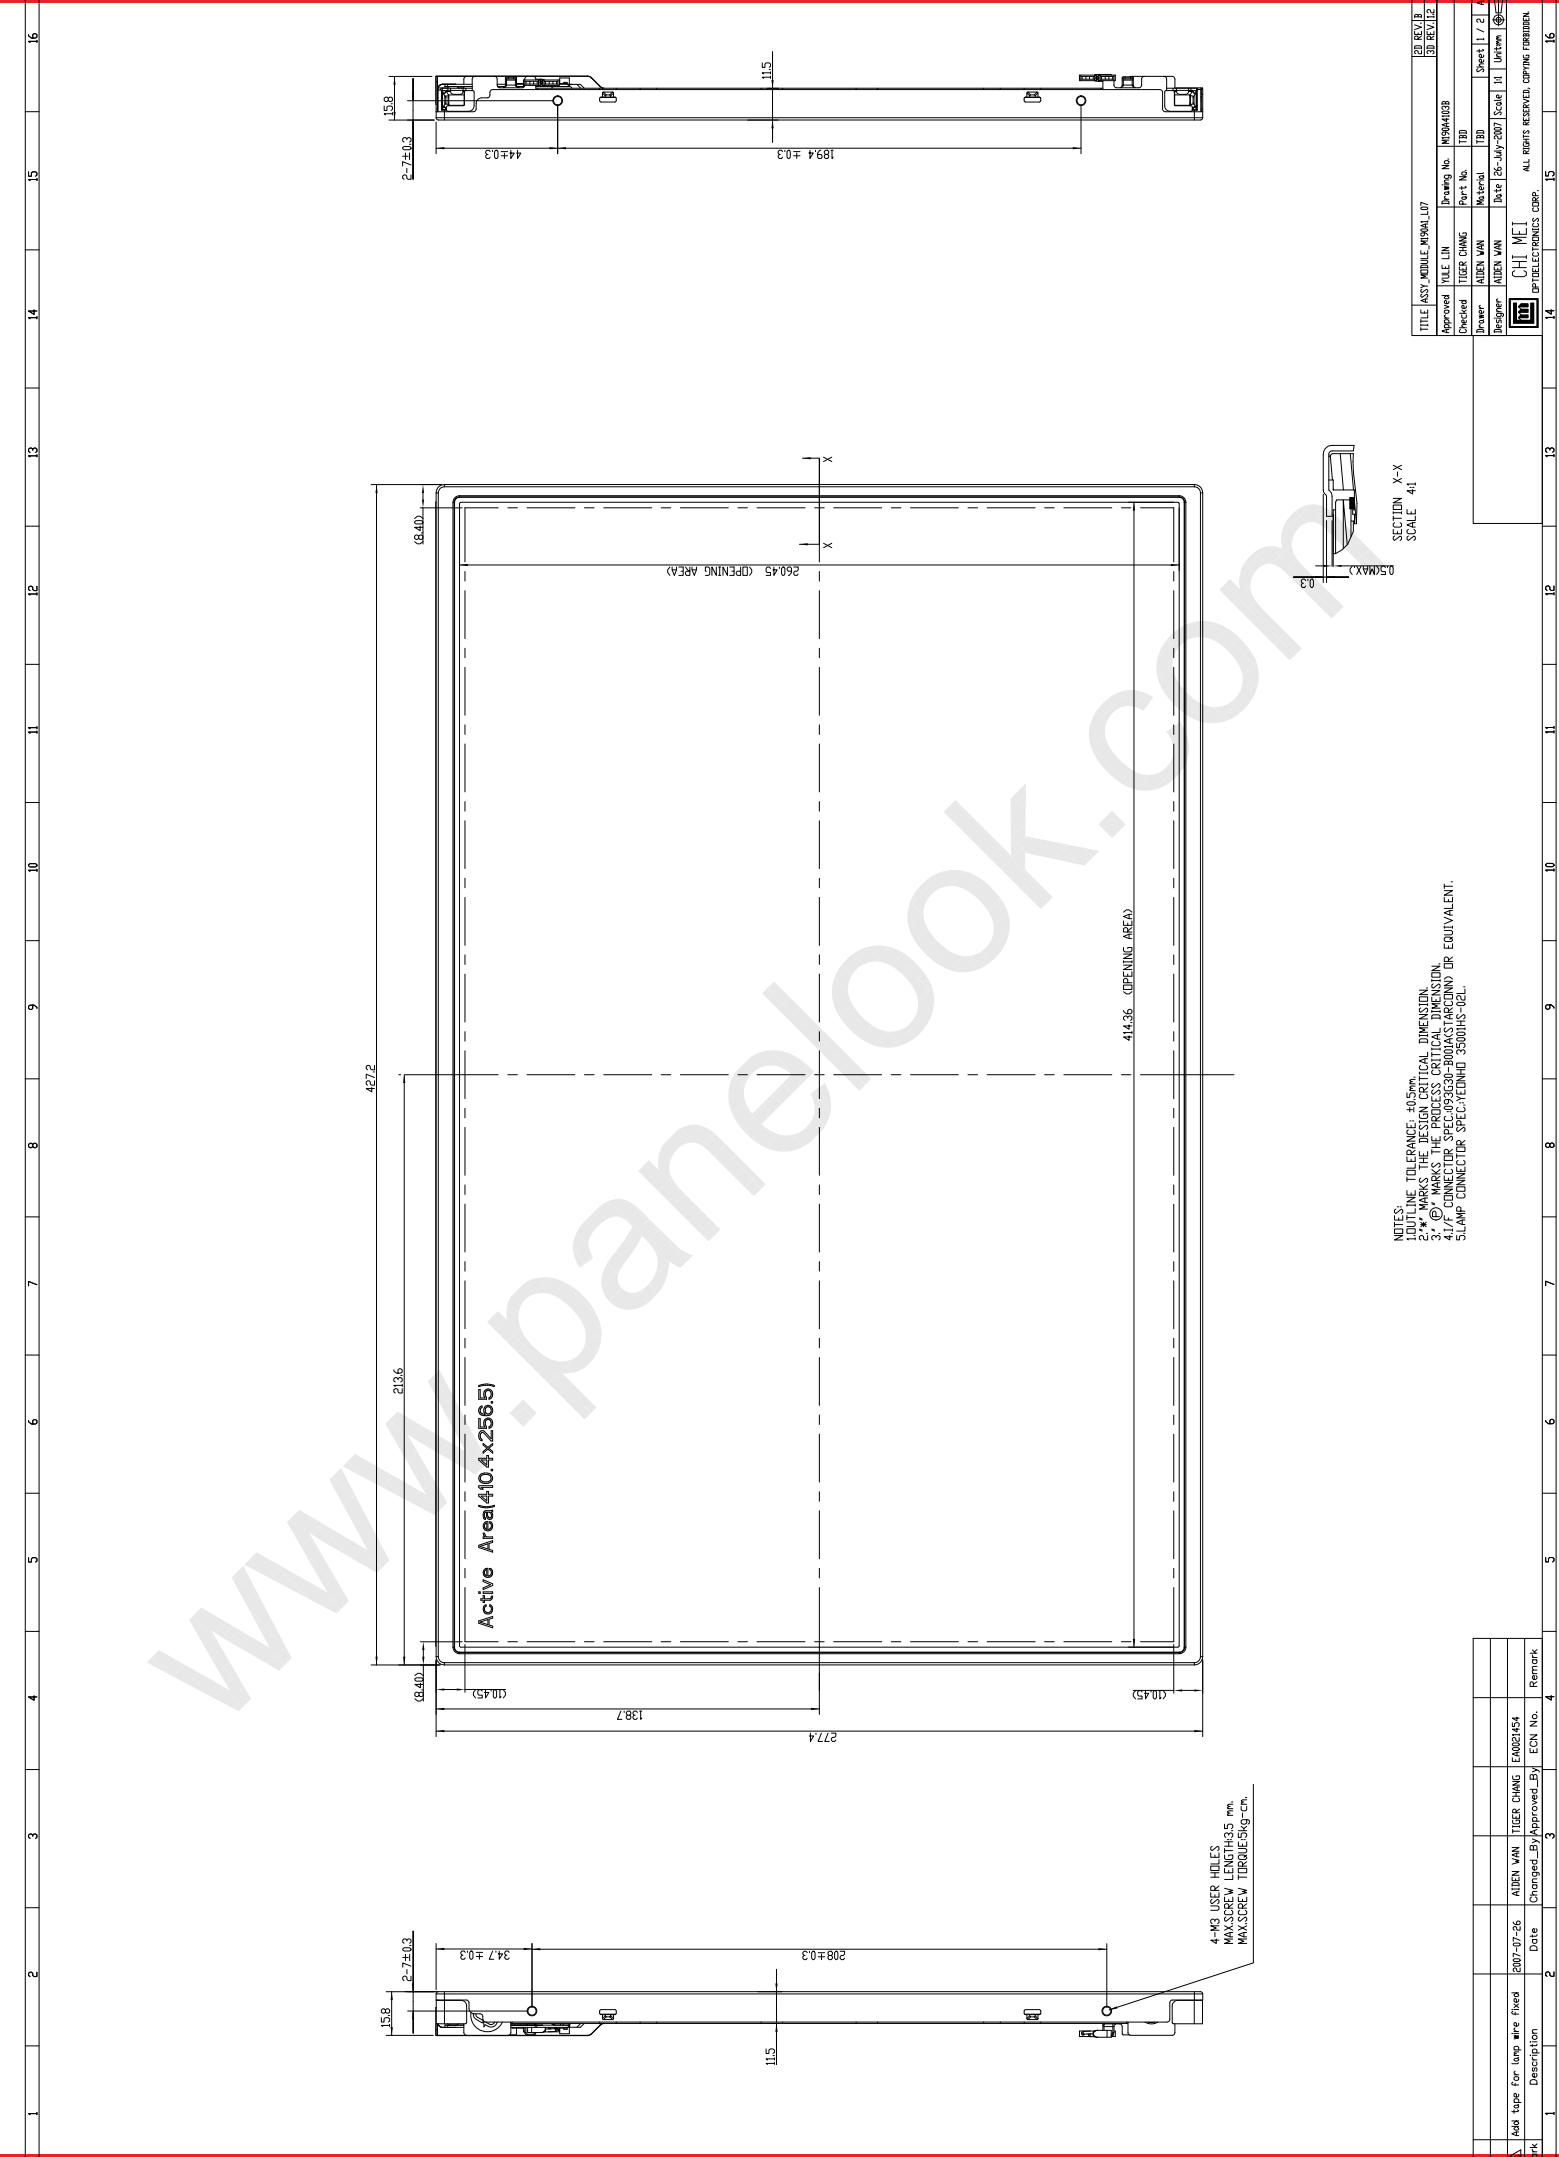| Code	Meaning	Description
CM	Supplier code	CMO=CM
19A17	Model number	M190A1-L07=19A17
X	Revision code	Non ZBD: 0~9, ZBD: A~Z
X	Source driver IC code	Century=1, CLL=2, Demos=3, Epson=4, Fujitsu=5, Himax=6, Hitachi=7, Hynix=8, LDI=9, Matsushita=A, NEC=B, Novatec=C, OKI=D, Philips=E, Renasas=F, Samsung=G, Sanyo=H, Sharp=I, TI=J, Topro=K, Toshiba=L, Windbond=M
X	Gate driver IC code	
XX	Cell location	Tainan, Taiwan=TN
L	Cell line #	0~12=0~C
XX	Module location	Tainan, Taiwan=TN , NB, China=NP
L	Module line #	0~12=0~C
YMD	Year, month, day	Year: 2001=1, 2002=2, 2003=3, 2004=4… Month: 1~12=1, 2, 3, ~, 9, A, B, C Day: 1~31= 1, 2, 3, ~, 9, A, B, C, ~, T, U, V
NNNN	Serial number	Manufacturing sequence of product

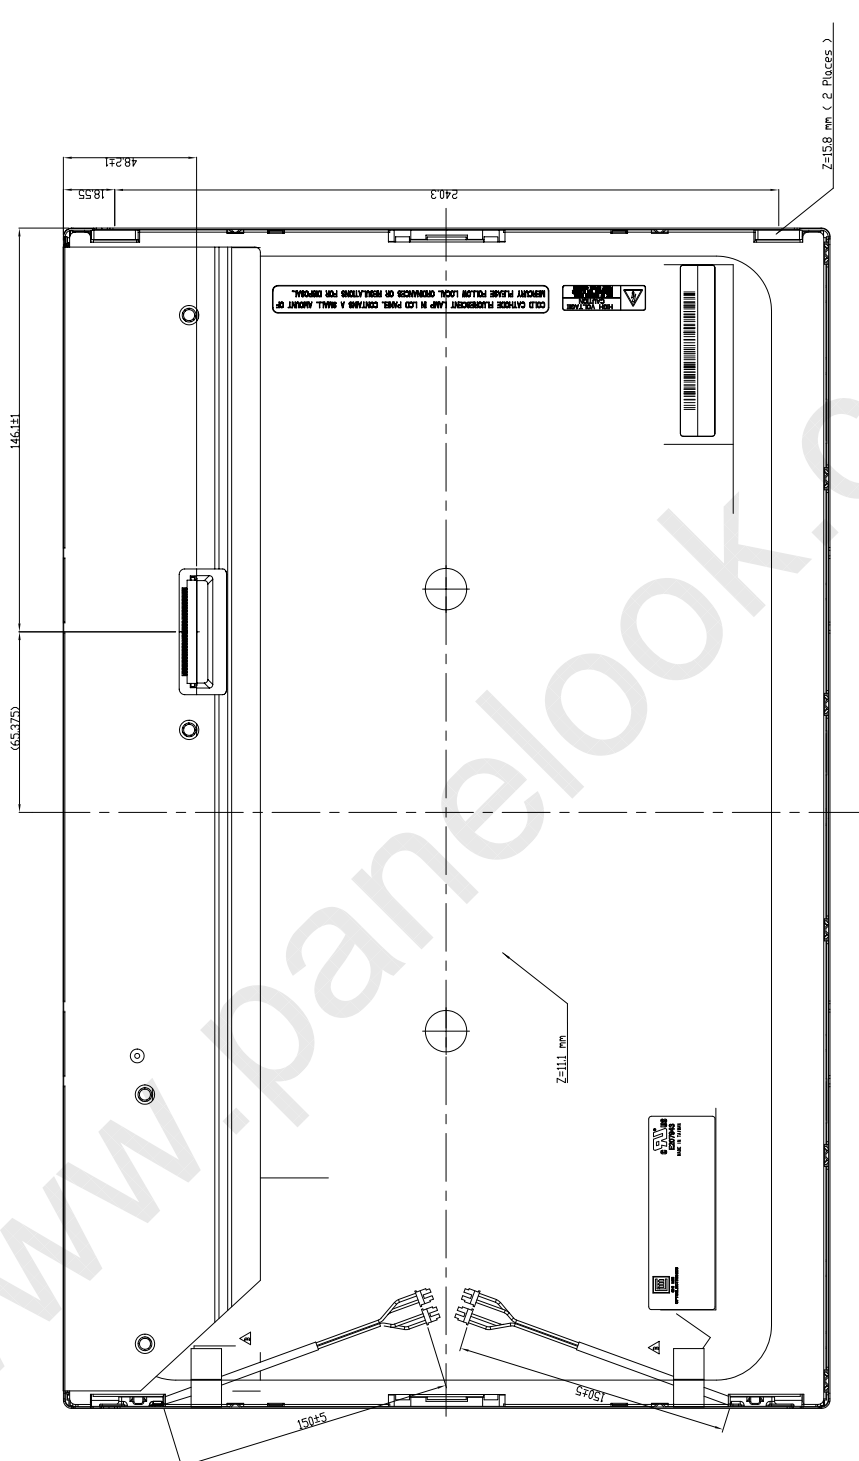22 / 25

Version 3.0

Approval

10. PRECAUTIONS

10.1 ASSEMBLY AND HANDLING PRECAUTIONS

(1) Do not apply rough force such as bending or twisting to the module during assembly.

(2) To assemble or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.

(3) It's not permitted to have pressure or impulse on the module because the LCD panel and Backlight will be damaged.

(4) Always follow the correct power sequence when LCD module is connecting and operating. This can prevent damage to the CMOS LSI chips during latch-up.

(5) Do not pull the I/F connector in or out while the module is operating.

(6) Do not disassemble the module.

(7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.

(8) It is dangerous that moisture come into or contacted the LCD module, because moisture may damage LCD module when it is operating.

(9) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.

(10) When ambient temperature is lower than 10ºC may reduce the display quality. For example, the response time will become slowly, and the starting voltage of CCFL will be higher than room temperature.

10.2 SAFETY PRECAUTIONS

(1) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with inverter. Do not disassemble the module or insert anything into the Backlight unit.

(2) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(3) After the module's end of life, it is not harmful in case of normal operation and storage.

Version 3.0

2D REV.B
3D REV.12

TITLE ASSY MODULE_M194A1_L07
Drawing No. M194A41D3B
Part No. TBD
Material TBD
Date 26-July-2007
Scale TBD
Sheet 1 / 2
Unit mm
Approved YULE LIN
Checked TIGER CHANG
Drawer AIDEN WAN
Designer AIDEN WAN

CHI MEI
CHI MEI OPTOELECTRONICS CORP.
ALL RIGHTS RESERVED, COPYING FORBIDDEN.

15.8
2.7±0.3
44±0.3
11.5
189.4±0.3

(8.40)
260.45 (OPENING AREA)
414.36 (OPENING AREA)
427.2
213.6
Active Area(410.4x256.5)
(8.40)
138.7
(10.45)
(10.45)
277.4

SECTION X-X
SCALE 4:1
0.5(MAX.)
0.3

NOTES:
1.OUTLINE TOLERANCE: ±0.5mm.
2.'*' MARKS THE DESIGN CRITICAL DIMENSION.
3.'Ⓟ' MARKS THE PROCESS CRITICAL DIMENSION.
4.I/F CONNECTOR SPEC.093G30-B001A(STARC(NN)) OR EQUIVALENT.
5.LAMP CONNECTOR SPEC.YEDINHD 35001HS-02L.

4-M3 USER HOLES
MAX.SCREW LENGTH:3.5 mm.
MAX.SCREW TORQUE:5kg-cm.

15.8
2.7±0.3
34.7±0.3
11.5
208±0.3

Mark	Description	Date	Changed_By	Approved_By	ECN No.	Remark
	Add tape for lamp wire fixed	2007-07-26	AIDEN WAN	TIGER CHANG	EA021454	

NOTES:
1.OUTLINE TOLERANCE: ±0.5mm.
2.'*' MARKS THE DESIGN CRITICAL DIMENSION.
3.'(P)' MARKS THE PROCESS CRITICAL DIMENSION.
4.I/F CONNECTOR SPEC:J093GB-B001AS(STARCONN) OR EQUIVALENT.
5.LAMP CONNECTOR SPEC:YEDINHD 35001HS-02L.

COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR DISPOSAL.

Z=15.8 mm (2 Places)
Z=11.1 mm

48.2±1
18.55
240.3
146.1±1
(65.375)
150±5

TITLE	ASSY MODULE_M196AL_L07				2D REV.B
					3D REV.12
Approved	YULE LIN	Drawing No.	M196A41D3B		Sheet 2 / 2
Checked	TIGER CHANG	Part No.	TBD		
Drawer	AIDEN WAN	Material	TBD		
Designer	AIDEN WAN	Date	26-July-2007	Scale 1:1	Unit mm

CHI MEI OPTOELECTRONICS CORP.   ALL RIGHTS RESERVED. COPYING FORBIDDEN.

Mark	Description	Date	Changed_By	Approved_By	ECN No.	Remark
	Add tape for lamp wire fixed	2007-07-26	AIDEN WAN	TIGER CHANG	EA00121454	